



# Environmental Product Declaration



THE INTERNATIONAL EPD® SYSTEM



In accordance with ISO 14025:2010 and EN 15804:2012+A2:2019/AC:2021

**EPD of multiple products, based on a representative product**

**(high-quality polybutadiene, two-component, solvent-free sealants for IGU).**

**POLIVER GP-AC**  
**POLIVER AC**  
**POLIVER AC-E**  
**POLIVER F**



Programme:

Programme operator:

EPD registration number:

Publication date:

Valid until:

The International EPD® System, [www.environdec.com](http://www.environdec.com)

EPD International AB

EPD-IES-13061:001

2024-07-25

2029-07-25

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)*

## General information

### Company information

The Fenzi Group is a leader in chemicals for glass processing. This particular focus on glass has allowed an extremely high degree of specialization and the manufacture of products whose quality is recognized around the world. The Group was established in 1941. Today, it is the international network capable of delivering the most complete range of solutions for the glass industry, with targeted, diversified products that deliver peak performance.

- **18 manufacturing plants and sales offices** around the world.
- Customers in more than **80 countries**.
- **#1 in the world** in the development of mirror-backing paints, sealants and spacers for insulating glass, precious-metal pastes and industrial decorative paints for flat and hollow glass, and solutions for digital printing on glass.

**The Fenzi Group has the largest, most complete range of solutions for the glass industry.** Whatever the field of application, all of the Group's products ensure the highest levels of performance in the market and, above all, the peace of mind that comes from total reliability, durability over time, ease-of-use and customer support staff trained to understand and meet the increasingly exacting needs of glass processors.

The products range includes:

- **Sealants and traditional and warm edge spacers for high-performance insulating glass.**
- **Decorative enamels and paints for flat and hollow glass**, with a vast range of applications - from architecture to interior design, home appliances to automotive, to glass packaging.
- **Mirror-backing paints and silvering solutions** engineered for the entire mirror production cycle.
- **Special glass enamels and precious-metal pastes.**
- The most state-of-the-art **technologies for digital printing on glass.**



<b>OWNER OF THE EPD</b>	Fenzi Group, Via Sant'Andrea 21, 20121 – Milano (MI) Italy
<b>MANUFACTURER</b>	Fenzi Group, Via Sant'Andrea 21, 20121 – Milano (MI) Italy
<b>NAME AND LOCATION OF PRODUCTION SITE</b>	Fenzi Belgium: Levisstraat (Gustaaf) 25, 1800 Vilvoorde, Belgium Fenzi Polska: Katowicka 23 A, 43-603 Jaworzno, Poland
<b>EPD PREPARED BY</b>	Fenzi Group – [ESG Manager & ESG local team]
<b>GEOGRAPHICAL SCOPE OF THE EPD®</b>	Global
<b>EPD® REGISTRATION NUMBER</b>	EPD-IES-13061:001
<b>DECLARATION ISSUED</b>	2024

**Contact** Alessandro Manzi - [esg@fenzigroup.com](mailto:esg@fenzigroup.com)

### Programme information

<b>PROGRAMME</b>	<b>THE INTERNATIONAL EPD® SYSTEM</b>
<b>ADDRESS</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>WEBSITE</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-MAIL</b>	<a href="mailto:info@environdec.com">info@environdec.com</a>

### Accountabilities for PCR, LCA and independent, third-party verification

#### Product Category Rules (PCR)

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR):

*PCR 2019:14 Construction products (EN 15804+A2) (1.3.3)*

*PCR 2019:14-c-PCR-017 c-PCR-017 Technical-chemical products (for construction sector) (c-PCR to PCR 2019:14) (adopted from EPD Norway 2022-07-08)*

PCR review was conducted by: *The Technical Committee of the International EPD® System*. See [www.environdec.com](http://www.environdec.com) for a list of members.

#### Life Cycle Assessment (LCA)

LCA accountability: Fenzi Group, Via Sant'Andrea 21, 20121 – Milano (MI) Italy

#### Third-party verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

☒ EPD verification by individual verifier

Third-party verifier: *Dr. Ugo Pretato – Studio Fieschi & Soci srl*

Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third party verifier:

☐ Yes ☒ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

## Product information

**Product name** POLIVER

**POLIVER**

TRADE NAME	NOTE
POLIVER GP-AC	<i>Representative product</i>
POLIVER AC	
POLIVER AC-E	
POLIVER F	

*The representative product of this EPD was chosen for highest production volumes.*

**Product description** POLIVER sealants are polyurethanes specifically formulated for sealing insulating glass units and come in several versions to meet the special needs of manufacturers and their systems. They are entirely solvent-free and can be used for the production of single- and double-sealed units.

POLIVER sealants provide:

- Outstanding adhesion properties and excellent workability
- High usability with the latest warm edge technologies
- Excellent compatibility with multiple glazing components
- Extreme resistance and stability, when exposed to humidity or UV rays.



Using the POLIVER range of products in an insulating glass unit ensures excellent resistance to water and stress along the edges of the unit and maintains high protection for primary sealing.

The POLIVER range of sealants is designed to perform as a gas barrier (low vapor and gas diffusion), and moisture barrier (resistance to water in liquid or gaseous form), and to provide chemical fogging resistance and structural bonding of the total unit.

Thanks to these features, POLIVER contributes to achieving long-term durability of the IG unit, and a high level of thermal performance by maintaining the seal and keeping the gases at optimum levels. This means extending the lifetime of windows and providing more comfortable indoor temperatures.

PROPERTY	RESULT	METHOD
<b>Base</b>	Polybutadiene	
<b>Colour</b>	Beige	
<b>Water Vapor Transmission Rate</b>	< 4,0 [g/m <sup>2</sup> ·d]	EN 1279-4
<b>Gas Permeation Rate</b>	< 1,0 [g/m <sup>2</sup> ·d]	EN 1279-4
<b>VOC %</b>	Conform	EN 16516
<b>Thermal Conductivity</b>	0,40 [W/(m·K)]	EN 10077-2
<b>Service Temperatures</b>	- 40°C to + 80°C	

*For detailed and complete product specifications please refer to the technical data sheet.*

## Product standards:

The products meet requirements established and measured following:

- EN 1279-2:2018 Glass in Building – Insulating Glass Units – Long term test method and requirements for moisture penetration.
- EN 1279-3:2018 Glass in Building – Insulating Glass Units – Long term test method and requirements for gas leakage rate and for gas concentration tolerances.
- EN 1279-4:2018 Glass in Building – Insulating Glass Units – Methods of test for the physical attributes of edge seal components and insert.
- EN 10077-2:2017 Thermal performance of windows, doors and shutters - Calculation of thermal transmittance - Numerical method for frames.
- EN 16516:2020 Construction Products – Assessment of release of Dangerous substances – Determination of emission into indoor air.

**UN CPC code** 35354






## LCA information

<b>Declared unit</b>	1 kg of product plus packaging
<b>Reference service life</b>	30 years, according to PCR EN 17074:2019
<b>Geographical scope</b>	Global
<b>Time representativeness</b>	The primary data was provided by all Fenzi Group's production site and refers to the year 2022
<b>Database and LCA software used</b>	Database Ecoinvent 3.9.1, with software SimaPro 9.5.0.0, package version: EF 3.1
<b>Description of system boundaries</b>	Cradle to gate with modules C1–C4 and module D (A1–A3 + C + D)
<b>Electricity grid CO<sub>2</sub> coefficient</b>	0,203 kg CO <sub>2</sub> eq/kWh based on the renewable and non-renewable fuel sources in Belgium 1,080 kg CO <sub>2</sub> eq/kWh based on the renewable and non-renewable fuel sources in Poland

## System diagram

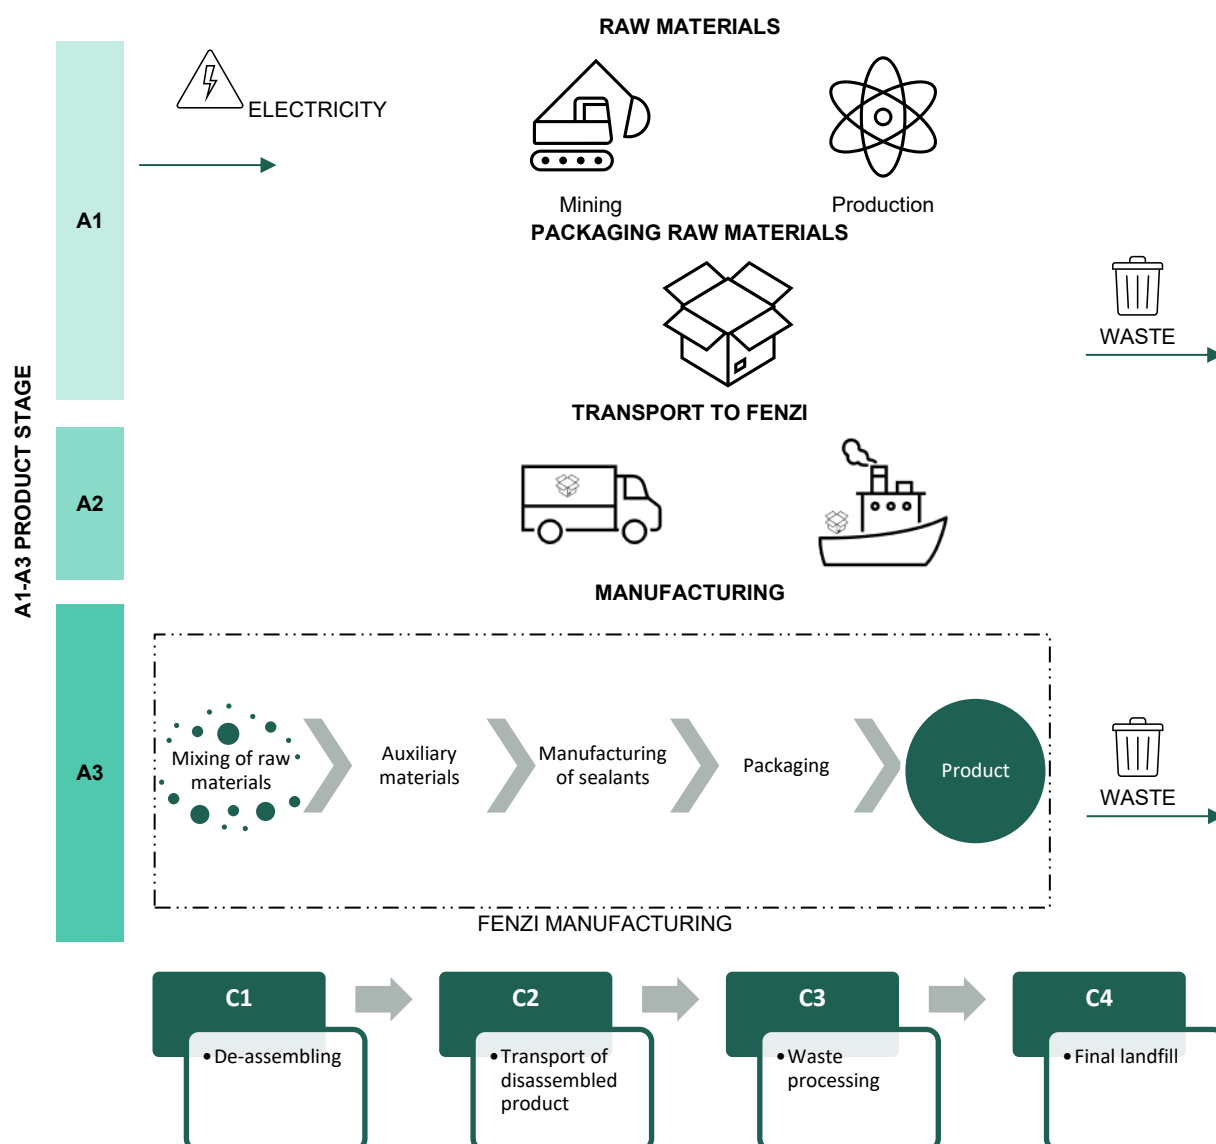

## A1 - RAW MATERIALS SUPPLY

A1 includes:

- extraction and processing of raw materials, until reaching a raw material, which cannot yet be defined as a finished product;
- generation and supply of energy necessary for the extraction and refining of the raw material;
- generation of energy used for production of the finished product;
- production of waste resulting from these processes;
- raw materials packaging.

Energy Source	Ecoinvent process	kg CO <sub>2</sub> eq/kWh
National electricity grid (BELGIUM)	Electricity, medium voltage {BE}  electricity, medium voltage, residual mix   Cut-off, U	0,203
National electricity grid (POLAND)	Electricity, medium voltage {PL}  electricity, medium voltage, residual mix   Cut-off, U	1,080

## A2 - TRANSPORT

A2 includes external and internal transport for the supply of raw materials.

The raw materials are transported to the manufacturing site. The modelling includes road and ship transportations of each raw material from the supplier's site to the manufacturing site.

Transport modality	Ecoinvent process
Road	Transport, freight, lorry 16-32 metric ton, EURO5 {RER}  transport, freight, lorry 16-32 metric ton, EURO5   Cut-off, U
Ship	Transport, freight, sea, container ship {GLO}  transport, freight, sea, container ship   Cut-off, U

## A3 - MANUFACTURING

A3 includes:

- production of the product;
- production of packaging accompanying the finished product;
- production of auxiliary materials used for the production of the product;
- management of waste related to the production process;
- production of emissions into the atmosphere.

**Manufacturing process** Sealants production is a batch process that involves mixing the various components until the homogeneous final product is obtained. It is carried out in various steps during which different energy sources are used for cooling, heating, and vacuum. At the end of mixing, product is extruded through a filtration station and finally packed in various formats depending to its intended usage. All processes and equipment are highly automated, plc driven and monitored with modest use of highly specialized labour. Any source of emission into the atmosphere is drastically reduced well below the limit prescribed by applicable regulations, no other sources of emission into the environment are foreseen (water, soil).

**Product packaging** Detailed data of product packaging is reported in the following table.



Material	Ecoinvent process
Plastic	Extrusion, plastic film {GLO}  market for extrusion, plastic film   Cut-off, U Polyethylene, low density, granulate {GLO}  market for polyethylene, low density, granulate   Cut-off, U
Metal	Steel, low-alloyed {GLO}  market for steel, low-alloyed   Cut-off, U Sheet rolling, steel {GLO}  market for sheet rolling, steel   Cut-off, U

**Auxiliary materials** All data relating to materials used for maintenance were excluded from the LCI: clothing and cleaning solvents, spare parts for machinery, air filters.

**Waste production** All waste produced during this stage is included.

**Emissions** To calculate the contribution relating to emissions generated by gas consumption, calorific value of 1 m<sup>3</sup> of gas is assumed equal to 36 MJ.

Emissions	Ecoinvent process
Generated by gas consumption	Heat, district or industrial, natural gas {Europe without Switzerland}  heat production, natural gas, at industrial furnace >100kW   Cut-off, U (mod_only emissions)

Emissions generated during production stage are included in the modelling.

#### **A4 - A5 CONSTRUCTION PROCESS STAGE**

A4 (Transport) and A5 (Construction installation) are not included.

#### **B1-B7 - USE STAGE**

B1-B7 are not included.

#### **C1-C4 – END OF LIFE STAGE**

C1 includes de-construction and demolition.  
C2 includes transport.  
C3 includes waste processing.  
C4 includes final disposal.

**Assumptions** Not having data provided by suppliers or scientific research or market analysis available, for the end-of-life scenario the following hypotheses were made:

- C1: manual de-assembling
- C2: transport for 50 km - Transport, freight, lorry 16-32 metric ton, EURO5 {RoW}| transport, freight, lorry 16-32 metric ton, EURO5 | Cut-off, U
- C3: 0% recycle
- C4: 100% landfill -Inert waste {RoW}| treatment of inert waste, sanitary landfill | Cut-off, U

#### **D - RESOURCE RECOVERY STAGE**

Module D quantifies the potential costs and benefits of end-of life recovery.

**Assumptions** 100% of wastes are considered landfilled. There is no reuse nor recovery nor recycling of this product. Hence, no recycling benefits are reported on stage D.

**Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results)**

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	GLO	GLO	EU										GLO				GLO
Specific data used	7,0%																
Variation – products	54,8% -3,1%																
Variation – sites	#																

#Note: The representative product is made only in one manufacturing site.

Regarding the share of specific data, according to 5.4.3 PCR 2019:14 v.1.3 definition, materials involved into production phase (e.g. raw materials) even when combined with specific activity data can't be qualified as specific data. Therefore, according to this, a computation of the sharing in GWP-GHG impact of other A1-A3 data are quantified in percentage terms over the total A1-A3 module. Generic data are raw materials, raw materials packaging, product packaging, auxiliary materials. According to this method, the share of specific data in GWP-GHG accounts for 7,0%.

As regards the data relating to the variation-products, they represent the difference in GWP-GHG between the representative product and the one with the best performance and between the representative product and the one with the worst performance.

Percentage variation of each environmental impact indicator, aggregated over all included modules (from A to C) between the value minimum and maximum of the included products:

%	ODP	AP	EP-freshwater	EP-marine	EP-terrestrial	POCP	ADP-minerals&metals*	ADP-fossil*	WDP*
Variation	86%	28%	52%	70%	47%	40%	43%	29%	64%

## Content information

Product components	Weight, %	Post-consumer material, weight-%	Biogenic material, kg C/kg
Fillers	60-80	0	0
Plasticizers	10-20	0	0
Esters	1-20	0	0,11
Polymers	5-15	0	0
Alcohols	1-6	0	0
Additives	0-5	0	0
Oxides	0-2,5	0	0
Desiccants	0-0,005	0	0

**TOTAL 100**

Packaging materials	Weight, kg	Weight, % (versus the product)	Weight biogenic carbon, kg C/kg
Plastic	0,0007	0,07	0
Metal	0,0452	4,52	0

**TOTAL 0,0459**

None of the substances included in the "Candidate List" (June 27<sup>th</sup>, 2024) or in the "Authorization List" (September 22<sup>nd</sup>, 2023), are contained in Products in concentration  $\geq 0,1$  % by weight.

None of the hazardous substances listed in Annex II of RoHS Directive 2011/65/EU (August 06<sup>th</sup>, 2011) and subsequent amendments, relating to restrictions on the use in electrical and electronic equipment are contained in concentration above prescribed limits.

## Results of the environmental performance indicators

The estimated impact results are only relative statements, which do not indicate the endpoints of the impacts categories, exceeding threshold values, safety margins and/or risks.

It is not recommended to use the results of modules A1-A3 without considering the results of module C.

### Mandatory impact category indicators according to EN 15804

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
GWP-fossil	kg CO <sub>2</sub> eq.	1,30E+00	0,00E+00	9,62E-03	0,00E+00	1,17E-02	0,00E+00
GWP-biogenic	kg CO <sub>2</sub> eq.	-4,10E-01	0,00E+00	3,24E-06	0,00E+00	4,10E-01	0,00E+00
GWP-luluc	kg CO <sub>2</sub> eq.	9,93E-02	0,00E+00	4,95E-06	0,00E+00	8,58E-06	0,00E+00
GWP-total	kg CO <sub>2</sub> eq.	9,91E-01	0,00E+00	9,62E-03	0,00E+00	1,18E-02	0,00E+00
ODP	kg CFC 11 eq.	3,44E-08	0,00E+00	1,44E-10	0,00E+00	2,77E-10	0,00E+00
AP	mol H <sup>+</sup> eq.	8,77E-03	0,00E+00	3,40E-05	0,00E+00	8,35E-05	0,00E+00
EP-freshwater	kg P eq.	3,15E-04	0,00E+00	7,81E-07	0,00E+00	3,07E-06	0,00E+00
EP-marine	kg N eq.	4,33E-03	0,00E+00	1,12E-05	0,00E+00	3,13E-05	0,00E+00
EP-terrestrial	mol N eq.	2,42E-02	0,00E+00	1,19E-04	0,00E+00	3,34E-04	0,00E+00
POCP	kg NMVOC eq.	9,09E-03	0,00E+00	4,58E-05	0,00E+00	1,13E-04	0,00E+00
ADP-minerals&metals*	kg Sb eq.	1,13E-05	0,00E+00	3,07E-08	0,00E+00	2,37E-08	0,00E+00
ADP-fossil*	MJ	2,39E+01	0,00E+00	1,35E-01	0,00E+00	2,54E-01	0,00E+00
WDP*	m <sup>3</sup> eq.	2,25E+00	0,00E+00	5,99E-04	0,00E+00	1,07E-02	0,00E+00
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption						

\* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

## Additional mandatory and voluntary impact category indicators

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
<b>GWP-GHG<sup>1</sup></b>	kg CO <sub>2</sub> eq.	1,40E+00	0,00E+00	9,57E-03	0,00E+00	1,17E-02	0,00E+00
Additional voluntary indicators e.g. the voluntary indicators from EN 15804 or the global indicators according to ISO 21930:2017							

## Resource use indicators

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
<b>PERE</b>	MJ	1,14E+01	0,00E+00	1,72E-03	0,00E+00	4,32E-03	0,00E+00
<b>PERM</b>	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>PERT</b>	MJ	1,14E+01	0,00E+00	1,72E-03	0,00E+00	4,32E-03	0,00E+00
<b>PENRE</b>	MJ	1,95E+01	0,00E+00	1,35E-01	0,00E+00	2,54E-01	0,00E+00
<b>PENRM</b>	MJ	4,34E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>PENRT</b>	MJ	2,39E+01	0,00E+00	1,35E-01	0,00E+00	2,54E-01	0,00E+00
<b>SM</b>	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>RSF</b>	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>NRSF</b>	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>FW</b>	m <sup>3</sup>	9,25E-02	0,00E+00	1,89E-05	0,00E+00	2,62E-04	0,00E+00
<b>Acronyms</b>	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water						

<sup>1</sup> This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO<sub>2</sub> is set to zero.

## Waste indicators

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed	kg	4,67E-05	0,00E+00	8,71E-07	0,00E+00	1,26E-06	0,00E+00
Non-hazardous waste disposed	kg	2,10E-01	0,00E+00	6,55E-03	0,00E+00	1,00E+00	0,00E+00
Radioactive waste disposed	kg	2,38E-05	0,00E+00	2,74E-08	0,00E+00	7,79E-08	0,00E+00

## Output flow indicators

Indicator	Unit	A1-A3	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	4,52E-02	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

## References

**ISO 14040:2021** Environmental management — Life Cycle Assessment — Principles and Framework

**ISO 14044:2021** Environmental Management — Life Cycle Assessment — Requirements and Guidelines

**ISO 14025:2010** Environmental labels and declarations — Type III environmental declarations — Principles and procedures

**EN 15804:2012+A2:2019** Sustainability of construction works — Environmental product declarations — Core rules for the product category of construction product

**General Programme Instructions of the International EPD® System. Version 4.0.**

**PCR 2019:14** Construction products (EN 15804+A2) (1.3.3)

**PCR 2019:14-c-PCR-017 c-PCR-017** Technical-chemical products (for construction sector) (c-PCR to PCR 2019:14) (adopted from EPD Norway 2022-07-08)

## Fenzi Group for sustainability

As a leading force in the glass industry, the Fenzi Group is committed to significantly reducing the environmental footprint of its products by opting for greener alternatives and using the most appropriate technologies and manufacturing processes for sustainable growth. The Group has set itself the ambitious goal of reducing emissions by 2050, with several milestones planned along the way. This includes phasing out greenhouse gas emissions by improving energy efficiency and increasing the use of renewable energy in its operations.

Fenzi supports the 17 SDGs and has taken up the challenge of implementing an integrated action plan for People, the Planet, Prosperity and Peace, showing its commitment to adhering in particular to SDGs shown in the image below:



For more information on the Fenzi Group: [www.fenzigroup.com](http://www.fenzigroup.com)



